


NLS-EM3090

OEM Scan Engine

- ◆ **UIMG® Technology**
- ◆ **Compact & Lightweight Design**
- ◆ **Superior 1D Barcode Reading Performance**
- ◆ **Outstanding Power Efficiency**
- ◆ **Multiple Interfaces**

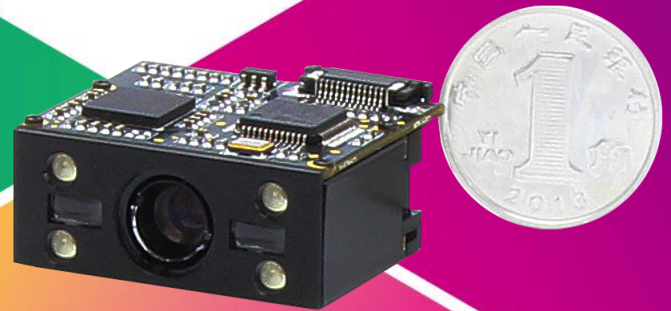

Features

- **UIMG® Technology**
Newland's sixth-generation **UIMG®** technology gives the scan engine an edge with unrivaled decoding capabilities on 1D & 2D barcodes.
- **Superior 1D Barcode Reading Performance**
Optimized for reading 1D barcodes, the NLS-EM3090 can decode high-volume 1D barcodes and those of poor quality effortlessly.
- **Multiple Interfaces**
The NLS-EM3090 supports USB and TTL-232 interfaces to meet diverse customer needs.
- **Compact & Lightweight Design**
Seamless integration of imager and decoder board makes the scan engine extremely small and lightweight and easy to fit into space-constrained equipment.
- **Outstanding Power Efficiency**
The advanced **NDC** technology incorporated in the scan engine helps reduce the power consumption and prolong the service life of the device.

Application Scenarios (as an accessory)

Self-service cabinets used in e-commerce, express delivery services and smart homes; ATMs; kiosks; queue machines; lottery machines; certificate makers.

OEM Scan Engine

Performance	Image Sensor		752×480 CMOS	
	Light Source		Red LED 625±10 nm	
	Symbolologies	2D		PDF417, QR Code (QR1/2, Micro), Data Matrix (ECC200, ECC000, 050, 080, 100, 140), Chinese Sensible Code
		1D		Code128, UCC/EAN-128, AIM128, EAN-8, EAN-13, ISBN/ISSN, UPC-E, UPC-A, Interleaved 2 of 5, ITF-6, ITF-4, Matrix 2 of 5, Industrial 25, Standard 25, Code 39, Codabar, Code 93, Code 11, Plessey, MSI-Plessey, GS1-DataBar™(RSS), (RSS-14, RSS-Limited, RSS-Expand)
	Resolution		≥5mil	
	Typical Depth of Field	EAN-13		50mm-445mm (13mil)
		PDF417		70mm-170mm (6.67mil)
		Code 39		50mm-285mm(5mil)
		Data Matrix		60mm-160mm (10mil)
		QR Code		30mm-220mm (15mil)
	Symbol Contrast			≥25% reflectance difference
	Scan Angle**			Roll: 360°, Pitch: ±55°, Skew: ±55°
Field of View			Horizontal 36°, Vertical 23°	
Mechanical/ Electrical	Interface		TTL-232, USB (HID-KBW, COM Port Emulation, HID-POS)	
	Operating Voltage		3.0~3.6VDC	
	Current@3.3VDC	Operating		190mA
		Idle		7mA
		Sleep		<5uA
	Dimensions			28.0(W)×24.5(D)×13.9(H)mm
Weight			9.5g	
Environmental	Operating Temperature		-20°C~+55°C (-4°F~131°F)	
	Storage Temperature		-40°C~+80°C (-40°F~176°F)	
	Humidity		5%~95% (non-condensing)	
	Ambient Light		0~100000lux (natural light)	
Accessories	NLS-EVK3000		Software development board for the NLS-EM3090, equipped with a trigger button, beeper and RS-232 & USB interfaces.	
	Cable	USB		Used to connect the NLS-EVK3000 to a host device.
		RS-232		Used to connect the NLS-EVK3000 to a host device.
	Power Adaptor			Used to provide power for the NLS-EVK3000. Output: DC5V, 2A; Input: AC100~240V, 50~60Hz

**Test conditions: Code 39; 3 Bytes; Resolution=10mil; W:N=3:1; PCS=0.8; Barcode Height=11mm; Scan Distance=120mm; T=23°C; Illumination=300lux.

Specifications are subject to change without notice.

Version: V1.0

Newland China
+86-400-608-0591
marketing@nlscan.com

Newland Europe
+31(0)-345-87-0033
info@newland-id.com

Newland Taiwan
+886-2-7731-5388
info@newland-id.com.tw

Newland North America
+1-510-490-3888
info@newlandna.com